


TekLok[®]

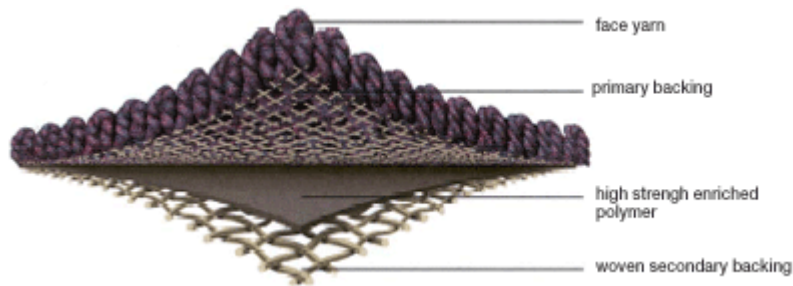

backing system	TekLok[®]
backing description	High strength enriched polymer precoat and secondary coat laminated to a woven secondary backing.
backing process	3-step process 1. Direct application of high-strength enriched polymer to back of carpet face. 2. Light coat of high-strength enriched polymer to woven secondary backing. 3. Layers are joined at compression roller.
primary	Synthetic
weight	35 oz/yd ² (average)
average thickness	.081 inch
width	12 feet (standard); optional widths available
test	Radiant Panel Fire -Class 1 (based on pile construction) NBS Smoke < 450 TVOCs < 500 micrograms/sqm/hr (meets CRI Green Label requirements)
installation	Direct glue with Shaw Subset 1000 or Shaw Subset 2057
warranty	Lifetime commercial
shawcontractgroup.com	To download details on installation, specifications, and warranties on-line
shaw inforum	call 1.877.502.7429 for personal assistance