


Ultraloc[®] MPC

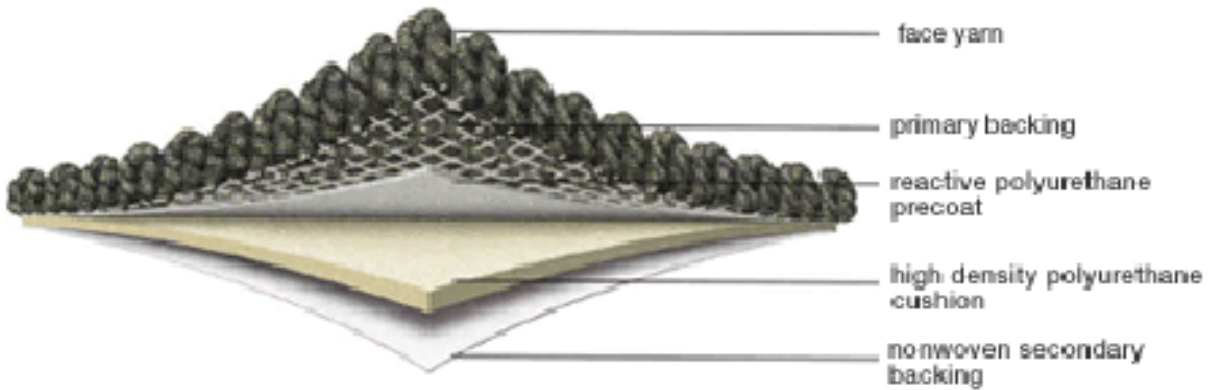

backing system	Ultraloc[®] MPC
backing description	High performance polyurethane precoat with an 18lb. density polyurethane foam cushion and a nonwoven secondary backing.
backing process	<p>3-step process</p> <ol style="list-style-type: none"> 1. Direct application of high-performance polyurethane to back of carpet face. 2. Application of polyurethane foam to the back of precoated carpet face. 3. Lamination of nonwoven secondary backing.
primary	Synthetic
weight	80 oz/yd ² (average)
average thickness	.231 inch
width	12 feet
foam density	18 lbs. Per cubic foot
test	<p>Radiant Panel Fire -Class 1 (based on pile construction) NBS Smoke < 450 Moisture barrier – 24 hr. British Spill Test TVOCs < 500 micrograms/sqm/hr (meets CRI Green Label requirements)</p>

antimicrobial protection	FlorSept® system antimicrobial protection
installation	Direct glue with Shaw Subset 1000 or Shaw Subset 2057
warranty	Lifetime commercial
shawcontractgroup.com	To download details on installation, specifications, and warranties on-line
shaw inforum	call 1.877.502.7429 for personal assistance